





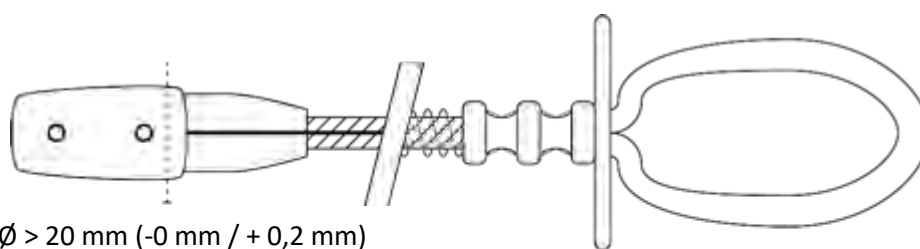



In LOCK

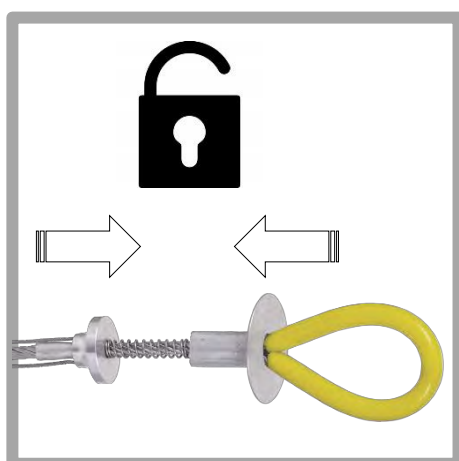

$\varnothing > 20 \text{ mm} (-0 \text{ mm} / +0,2 \text{ mm})$



<b>HS CODE</b>
73160010
<b>CARTON SIZE / PCS.</b>
60 x 40 x 24 cm / 30
<b>AET CE N°16-0103</b>
<b>DOLOMITICERT N°2008</b> Zona Industriale Villanova 32013 Longarona(BL) Italy
<b>MODULE D FI14/14003.02</b>
<b>SGS Fimko Oy, N°0598</b> Takomotie 8, 00380 HELSINKI, Finland


REF.	FA 60 018 00
CE	EN 795:2012 Type B
	x1
MAT.	
DIM.	110 mm
R (kN) / MBS (kN)	12 kN / 15 kN
	Ø 18 mm – 19 mm x 110 mm
	0.15 KG



**Nombre d'utilisateurs**  
 Number of users  
**Cantidad de usuarios**  
 Cantidad de usuarios  
 Quantità di utilizzatori  
 Anzahl der Benutzer

**R (kN) / MBS (kN)**

**Résistance statique (en kN) / Résistance à la rupture**  
 Static strength / Minimum Breaking Strength  
**Resistencia estática (en kN) / Resistencia a la ruptura (en kN)**  
 Resistencia estática (in kN) / Resistencia a la ruptura (in kN)  
**Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)**



**Fixations à utiliser / Dimensions de la structure d'accueil**  
 Fasteners to use / Dimension of the receiving structure  
**Fijaciones que deben usarse / Dimensiones de la estructura receptora**  
 Elementi di fissaggio da utilizzare / Dimensioni della struttura ospitante  
**Zu verwendende Befestigungen / Abmessungen der Aufnahmestruktur**